


Dial Indicators

SERIES 2 — Metric Standard Type


DIMENSIONS

ISO/JIS
Type


Unit: mm

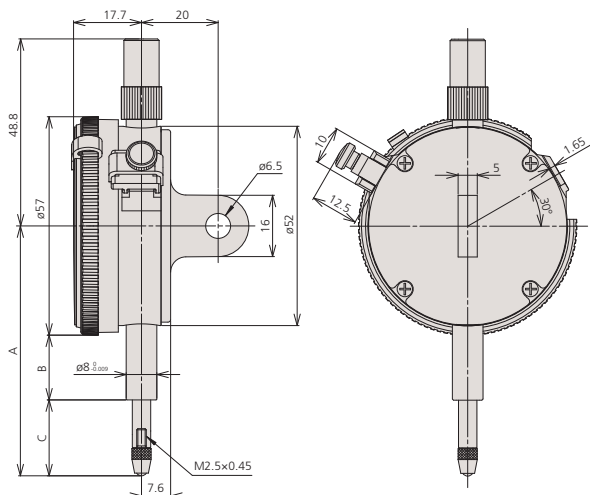


Order No.	A	B	C
2124S-10	60.3	16.9	14.9
2110S-10	66.5	16.9	21.1
2110S-70	67.5	12.3	26.7
2109S-10	60.5	16.9	15.1
2109S-70	65.3	12.3	24.5
2113S-10	61	16.9	15.6
2118S-10	60.3	16.9	14.9
2119S-10	60.3	16.9	14.9
2044S	65.2	16.9	19.8
2044S-09	65.2	16.9	19.8
2044S-60	70	12.3	29.2
2045S	65.2	16.9	19.8
2046S	65.2	16.9	19.8
2046SH	65.2	16.9	19.8
2046SLB	85.2	36.9	19.8
2046S-09	65.2	16.9	19.8
2046S-60	70	12.3	29.2
2046S-69	70	12.3	29.2
2046S-15	65.2	16.9	19.8
2310S-10	65.2	16.9	19.8
2902S	65.2	16.9	19.8
2047S	65.2	16.9	19.8



2902S



2310S-10




2044S
2044S-60
2044S-09



2045S

ISO/JIS
Type

Unit: mm

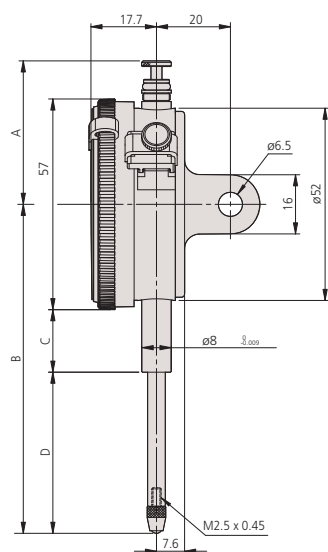

Order No.	A	B	C	D
2050S	38.8	75.2	16.9	29.8
2050S-60	59.8	87.2	12.3	46.4
2050S-19	38.8	75.2	16.9	29.8
2320S-10	38.8	75.2	16.9	29.8
2052S	38.8	88.7	16.9	43.3
2052S-19	38.8	88.7	16.9	43.3
2330S-10	38.8	88.7	16.9	43.3
2952S	38.8	88.7	16.9	43.3

Optional Accessories

- Backs (See page F-33.)
- Contact points (See page F-34.)