

2D Height Gauges



1.

WHAT IS A 2D HEIGHT GAUGE?

A height gauge is a dimensional measuring instrument with a single vertical axis used on a granite table. It is used universally for the measurement of mechanical parts. Its preferred location is the workshop, close to the machining center, or the measuring room. It provides **accurate**, **fast** and **easy** measurement of parts in production, directly by the operator.


The measurement of distances, diameters and center distances are the basic functions of a height gauge. The most sophisticated models (2D) offer advanced functionalities such as 2-dimensional measurement, statistics or programming, but also measurement of perpendicularity, angle, flatness and temperature compensation.

The height gauge is positioned between the hand tools and the 3D measuring machines (CMMs). It offers the following advantages :

- Measuring accuracy similar to the best CMMs
- Universal measuring instrument, substitutes for most hand tools
- Extremely fast and simple measurement
- Autonomous operation on rechargeable batteries
- Use close to the machining center, no bottlenecks in metrology
- Time savings compared to a CMM for equivalent measurements
- Allows measurements that were previously only possible on CMMs, e.g. 2D
- Allows you to reserve CMM time for the most complex tasks
- Considering the above points, the return on investment is very fast.




Complements all hand tools

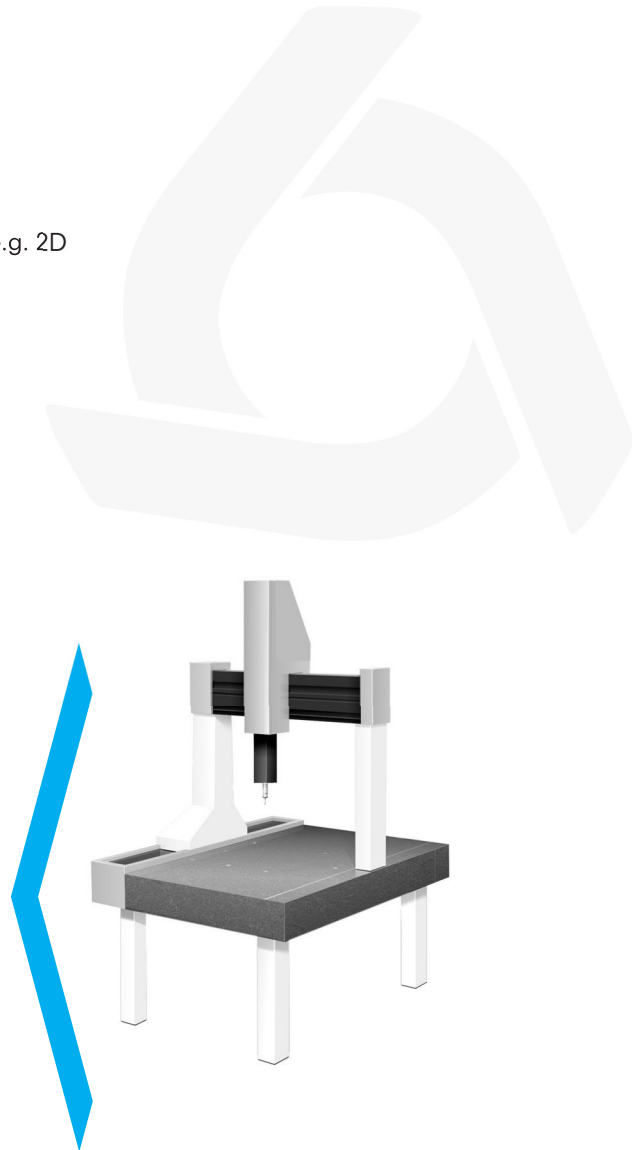

Eliminates your metrology bottlenecks

2.

WHAT IS THE PURPOSE OF A 2D HEIGHT GAUGE?

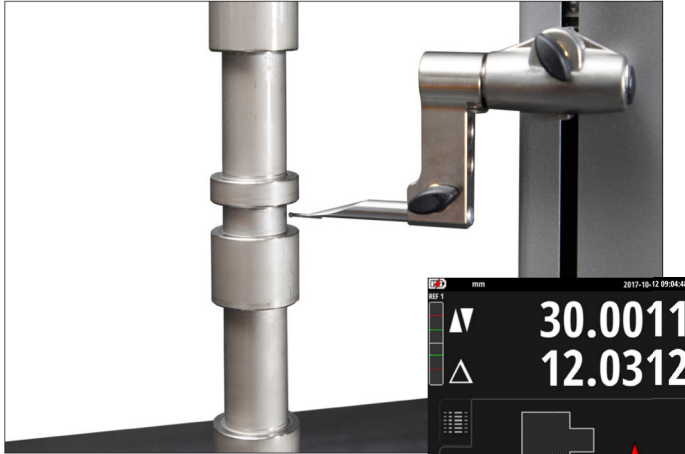

Height measurements

The basic functions of height gauges include measuring heights, thicknesses and chain dimensions. V7 and V9 offer unique measuring ergonomics and readability. The absolute dimension (=from zero) and the distance from the last probe are displayed at the same time for each measurement. This allows a very efficient measurement of chain dimensions. All results are displayed in the buffer as a list. The tolerated dimensions are displayed in colour according to the result.



Diameter measurements

Diameters have never been easier to measure.

In manual mode, simply engage the measuring force and move the part sideways to pass the reversal point. No need to hold the crank handle during this operation. In motorized mode, diameter measurement is performed automatically in a single operation. The reversal points are clearly indicated by audible and visual signals. The user is thus guided precisely during diameter measurement, which results in a significant increase in speed and reliability of the result.



Measurement in 2 coordinates (2D)

The display of V7 and V9 offers possibilities of graphic visualization never before achieved on a height gauge. The large screen size makes it possible to display the part in 2D in a very comfortable way. Simply measure the part as normal, rotate it and measure it again in the 2nd axis. The results appear immediately on the screen in 2 dimensions. It is then very easy and intuitive to measure distances, angles, regression circles etc. by clicking directly on the various bores displayed.



Measurement of series of workpieces

Programming is very useful for repetitive series of parts. Simply measure the part normally to make a program. User comments can be added for greater clarity of the tasks to be performed. In motorized mode the user only has to follow the program steps and move the part to be measured. The instrument manages the rest automatically. The statistical analysis of the results is carried out directly by the SPC software integrated in the display.

3.

PRESENTATION

In order to ensure the highest precision and reliability we use only the best measuring systems on the market.

2nd probe holder for measuring range extension.

Interchangeable insert and insert holder.

Inserts up to **400 mm** in length are available as standard (V7) with breathtaking repeatability. The very robust mechanics of the V7 allows the use of probes up to 400 g.

Cast iron base with hard nickel plating providing excellent corrosion and wear resistance.

Horizontal movement handle with air cushion engagement button and 2 programmable function buttons for the most frequently used functions.

Tablet-type display consisting of a touch screen that has proven itself in many industrial applications. Its size (8 ") offers exceptional reading comfort.

The uncompromising ergonomics of the interface have been designed to ensure ease of use in workshop conditions.

Only the functions useful for the measurement in progress are displayed, which reduces the number of buttons and simplifies use.

The display can be rotated in any direction



Handwheel for moving the measuring carriage:
The motorised mode can be switched on at any time by pulling the crank handle outwards. In manual mode, it is not necessary to hold it in position during measurement.

This ensures a constant measuring force and makes diameter measurements much easier.

4.

TRIMOS 2D INSTRUMENTS

V7 : Accessible to everyone in the workshop



The V7 are available with measuring ranges from 400 to 1800 mm. They have been designed for use in the workshop. Their special feature is an extremely robust mechanics allowing the use of probes of various lengths and masses.

V9 : Focus on precision



The V9 are available in 3 different sizes: 400, 700 and 1100 mm. Their mechanical design has made no compromise on precision. This is what allows them to be positioned as the most accurate height gauge on the market.

5.

DISPLAY



Clear interface


The graphical interface is organised according to a very strict logic. Ergonomics, button positions, colours and menu sequences are based on the experience of 7 generations of height gauges and proven ergonomic principles. The result speaks for itself :

- Very sober display
- No «pollution» of the screen with unnecessary information and small print
- Maximum contrast for easy reading even in difficult lighting conditions
- The size of the screen (8 ") allows the display of very large characters with very wide viewing angles in all directions (IPS panel).
- The flexibility offered by the touch screen allows only the necessary functions to be displayed.
- Intuitive and easy operation
- Quick and direct access to all important functions
- Integrated graphical help




Perpendicularity

The perpendicularity measurements made with the electronic probe are displayed graphically together with all relevant parameters. The curve is drawn in real time during the measurement and clearly indicates the workpiece defect.

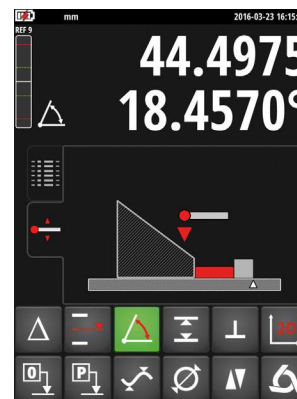


Angles

The angle and cone measurements are interactively carried out with the help of graphical support. At each step, the user is guided on the action to be carried out. There is therefore no risk of error.

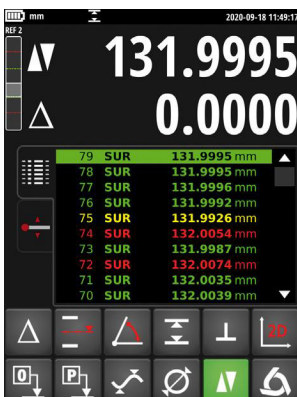

Tolerances

The dimensions can be toleranced when measuring series of parts. For each measurement, the value is displayed in colour depending on whether or not the specified tolerance is met.

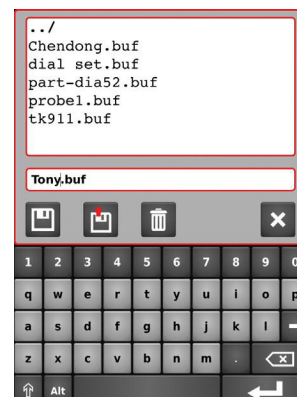

Data backup

All measurement results can be saved on a USB stick or in the display itself. They can be recalled from the display at any time or exported to a PC for analysis.

6.

DATA MANAGEMENT

Embedded intelligence

The V7 and V9 are well equipped to meet the challenges of Industry 4.0. Thanks to their communication interfaces, these instruments can be integrated into any industrial environment.

3 Interfaces



The display has 5 USB ports. These allow individual or group measurements to be sent to a PC, connected to a USB printer or saved on a USB stick. The connection is made with a standard USB A-B cable.



RS232 interfaces are still widely used in workshops. This means that an existing height gauge can be replaced as is without changing its connection parameters.



Trimos offers a reliable and simple solution for wireless data transmission (available as an accessory). Connection to a PC is possible via the free **TrimosDataTransfer** software. The solution is also compatible with the Sylvac Sylcom and Vmux software.

Numerous possibilities to exploit the data

Sending data to a PC:

Sending data to a PC via USB, RS232 or wireless is child's play. The free TrimosDataTransfer software allows you to send data to any application.



Communication software TrimosDataTransfer:



Sending to a USB printer:

The majority of USB printers on the market can be connected to the instrument. Customised reports can be configured directly on the display. This makes it possible to publish results professionally, quickly, easily and without the need for a PC.



Backup to USB key:

All the data produced by the instrument (measurements, programmes, statistics, perpendicularity, 2D etc.) can be saved on a USB key. This is also the case for measurement reports which are saved in PDF format. The saved files can easily be used with standard PC programs.



Printing on a thermal printer:

A thermal printer is part of the standard accessories. It is mounted directly on the back of the display as an integral part of the instrument. It allows you to export each measured value one by one.



Professional measurement reports:

10-344

OK

jeff

2020-09-18 13:46:32


Trimos V7 15417603 v131

#	Type	Value	Tolerance	Target	LTL	UTL
2	SUR	0.0023				
4	SUR	80.0580		80.0000	-0.1000	0.1000
5	SUR	60.0324		60.0000	-0.1000	0.1000
7	CEN	10.1083				
8	DIA	5.3673				
9	CEN	70.1291				
10	DIA	5.3027				
12	DIF	60.0208		60.0000	-0.0500	0.0500
14	CEN	30.1983				
15	DELTA	9.5112				
16	CEN	50.2442				
17	DELTA	9.4820				
19	DIF	20.0459		20.0000	-0.0500	0.0500

Page 1/2


7.

KEY POINTS




Long probes

The highly robust construction of the Trimos V7 height gauges allows the use of a wide variety of probes up to 400 mm in length with breathtaking repeatability. Adjustment of the balance to compensate for the weight of the probe is carried out simply by means of a thumbwheel and requires no tools.




Accuracy

The V9 have been developed for the most demanding users. Laboratories and workshops for which measurement reliability is crucial will fully appreciate their exceptional level of accuracy.




SmartReverse

SmartReverse technology makes diameter measurement very efficient by clearly indicating the passage of reversal points with audible and visual signals. This provides the user with precise guidance when measuring diameters, resulting in a significant increase in measurement speed and reliability.



Manual and motorised movement

The V7 and V9 are equipped with a revolutionary handwheel that allows the user to move the measuring carriage either manually or motorised. Each of these modes is uncompromising, meaning that the user who prefers a manual instrument will not notice any difference compared to a conventional manual instrument, and the same goes for a motorised movement. This innovation avoids making a difficult choice when acquiring an instrument and makes it possible to satisfy multiple potential users of the same instrument.



Electronically adjustable measuring force

The measuring force can become an important criterion depending on the material being measured and in particular its modulus of elasticity. If the material deforms during probing, the measurement result will be affected. For this reason, the measuring force of V7 and V9 can be adjusted with a simple click.




Ergonomics

Hand tools (calipers or micrometers of all kinds) are designed to be operated with the right hand while holding the piece in the left hand. This natural configuration is found on the Trimos height gauge. The crank handle on the right side of the instrument allows the user to maintain control of the measurement at all times with a comfortable position of the hand on the crank handle. The left hand is dedicated to the movement of the workpiece to be measured. The orientation of the screen ensures perfect readability in all configurations.




Adjusting the display position

The display can be rotated in all directions. It has been designed for optimum legibility in all lighting conditions. Clear graphics and information displayed in white on a black background ensure maximum reading comfort. The font size has been chosen for simple, safe and efficient reading of the measurement results.



Air cushion

The air cushion under the base allows the instrument to be moved effortlessly. It is electronically adjustable to suit all types and qualities of measuring tables.



Accessories

The range of accessories available covers almost all applications. The unique probe weight compensation system also allows the use of specific probes up to 400 g.



Remote control

All functions and movements of the instrument can be controlled remotely (wired or wireless). This allows the automation of measuring procedures in the context of high quality requirements.

V7		400	700	1100	1800
Measuring range	mm (in)	407 (16)	711 (28)	1110 (44)	1810 (71)
Application range	mm (in)	719 (28)	1023 (40)	1422 (56)	2122 (83)
Max. permissible errors, B _{MPE}	µm	2 + L(mm)/400			2.5 + L(mm)/300
Repeatability, R _{MPE} (2s)	µm	1 (Ø: 2)			
Perpendicularity deviation (frontal), S _{MPE}	µm	5	8	11	25
Max. resolution	mm (in)	0.0001 (.00001)			
Measuring force	N	0.75 ÷ 1.5			
Autonomy	h	12			
Data output		USB / RS232 / wireless (option)			
Air cushion		Yes			
Weight	kg	22	25	34	41

The above values have been determined according to ISO 13225 with the standard insert (TA-MI-101).

V9		400	700	1100
Measuring range	mm (in)	406 (16)	710 (28)	1109 (43)
Application range	mm (in)	724 (28)	1028 (40)	1427 (56)
Max. permissible errors, B _{MPE}	µm	1.2 + L(mm)/1000		
Repeatability, R _{MPE} (2s)	µm	0.4 (Ø: 1)		
Perpendicularity deviation (frontal), S _{MPE}	µm	5	8	11
Max. resolution	mm (in)	0.0001 (0.00001)		
Measuring force	N	0.75 ÷ 1.5		
Autonomy	h	12		
Data output		USB / RS232 / wireless (option)		
Air cushion		Yes		
Weight	kg	21	24	33

The above values have been determined according to ISO 13225 with the standard insert (TA-MI-119).

Functions

- Heights, thicknesses
- Chain dimensions
- Diameters
- Centre distances
- Minimum, maximum
- Flatness
- Perpendicularity
- Zero, Preset
- 9 references
- mm/in
- Calculation between values
- Angles and cones
- Tolerances
- Inversion of measuring direction
- Measurements in 2 coordinates (2D)
- Measurement sequences
- Statistical analysis
- USB, RS232 & wireless data transfer
- Backup to USB key
- Screenshots
- Remote control
- Adjustable measuring force

